



禾剛企業有限公司  
HOU GUN ENTERPRISE CO., LTD.

REV	DESCRIPTION	DATE
A		220111

客戶簽名確認章

TITLE  
M12 FEMALE MOLDING CABLE

P/N:



DWG. NO: HGFxx-M12xxP-CB

DR. Dan UNIT: mm

CH. Jason SCALE 1:1

AP. Lanny UNLESS OTHERWISE SPECIFIED TOLERANCES:

REV. A	SHEET 1/1	x ± 0.20 xxx ± 0.05 xx ± 0.10 ANGLE ± 1°
--------	-----------	---

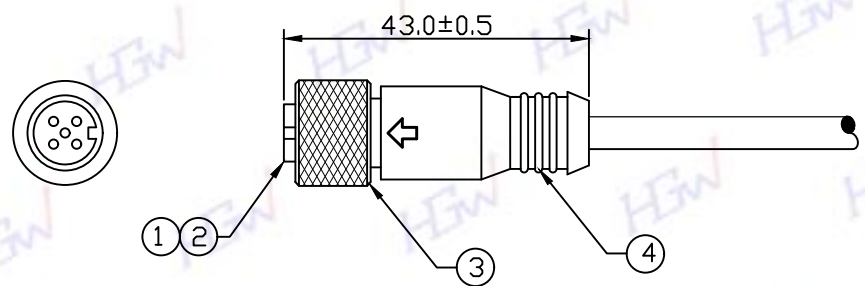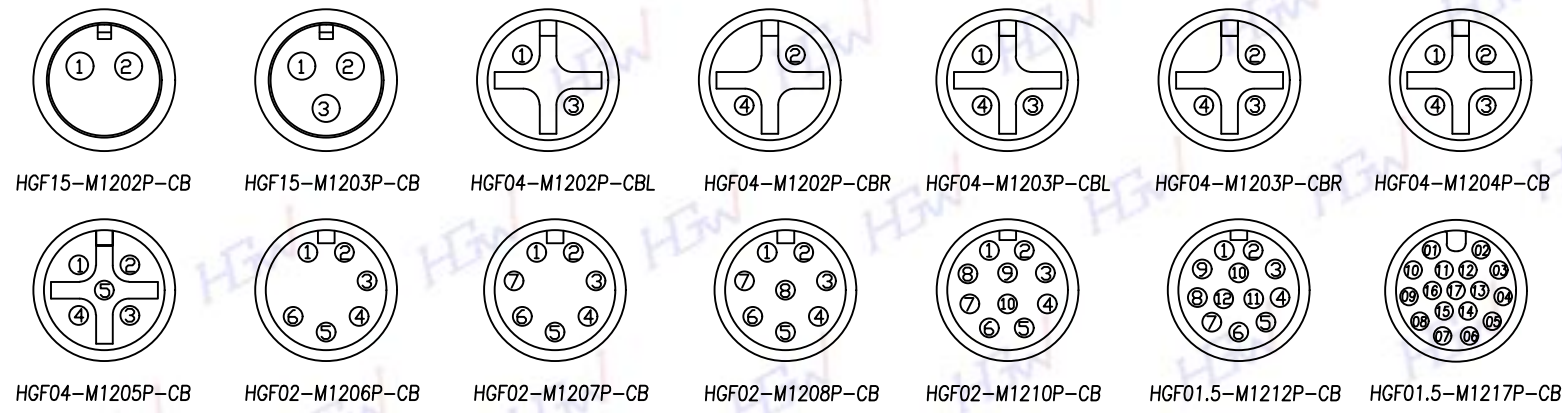

NOTES:  
 1.ELECTRICAL SPECIFICATION  
 1-1.RATED CURRENT: 15A/4A/2A/1.5A  
 1-2.RATED VOLTAGE: 250V/60V/30V  
 1-3.WATERPROOF: IP67  
 2.ENVIRONMENTAL  
 2-1.OPERATION TEMPERATURE: -20°~80°C  
 3.PART NUMBER SPECIFICATION  
 3-1.HGFxx-M12xxP-CB  
 02 - 2 PINS 07 - 07 PINS  
 03 - 3 PINS 08 - 08 PINS  
 04 - 4 PINS 10 - 10 PINS  
 05 - 5 PINS 12 - 12 PINS  
 06 - 6 PINS 17 - 17 PINS

- 1.CONNECTOR: M12 FEMALE CONNECTOR INSERT ,for1
- 2.CONTACT: BRASS,FEMALE PIN,GOLD FLASH ,forN
- 3.RING NUT: BRASS,NICKEL PLATED ,for1
- 4.MOLDING: PVC ,for1

- 15-CURRENT RATING 15A
- 04-CURRENT RATING 4A
- 02-CURRENT RATING 2A
- 01.5-CURRENT RATING 1.5A

RATED VOLTAGE: 2~4PIN/250V ; 5~12PIN/60V ; 17PIN/30V