





禾剛企業有限公司
HOU GUN ENTERPRISE CO., LTD.


REV	DESCRIPTION	DATE
A		220106




HGF04-M802P-CB90




HGF04-M803P-CB90



HGF04-M804'P-CB90




HGF02-M805'P-CB90




HGF02-M806'P-CB90




HGF04-M804P-CB90



HGF02-M805P-CB90



HGF02-M806P-CB90




HGF01.5-M808P-CB90



NUT for 5',6' PIN



NUT for 5,6,8 PIN

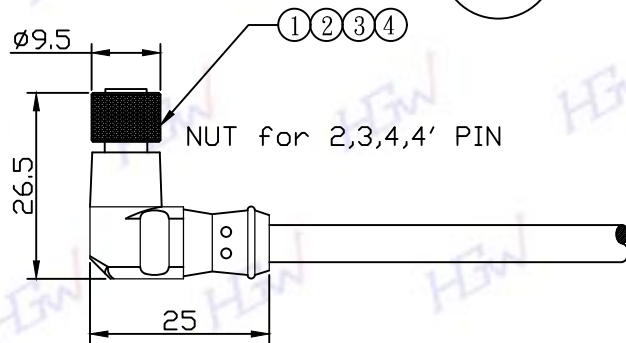

NOTES:

1.ELECTRICAL SPECIFICATION

1-1.RATED CURRENT: 4A/2A/1.5A

1-2.RATED VOLTAGE: 60V/30V

1-3.WATERPROOF: IP67

2.ENVIRONMENTAL

2-1.OPERATION TEMPERATURE: -20~80°C

3.PART NUMBER SPECIFICATION

3-1.HGMxx-M8xxP-CB

02 - 2 PINS 03 - 3 PINS

04 - 4 PINS 05 - 5 PINS

06 - 6 PINS 08 - 8 PINS

04-CURRENT RATING 4A

02-CURRENT RATING 2A

01.5-CURRENT RATING 1.5A

1.CONNECTOR: M8 FEMALE CONNECTOR ,for1

2.CONTACT: BRASS,FEMALE PIN,NICKEL PLATED ,forN

3.O-RING: VITON ,for1

4.RING NUT: BRASS,NICKEL PLATED (WITH RATCHET MECHANISM, WITHOUT SLEEVE) ,for1

客戶簽名確認章

TITLE
M8 FEMALE 90° MOLDING CABLE

P/N:

DWG. NO: HGFxx-M8xxP-CB90

DR. Dan UNIT: mm

CH. Jason SCALE 1:1

AP. Lanny UNLESS OTHERWISE SPECIFIED TOLERANCES:

REV. A	SHEET 1/1	X ± 0.20	XXX ± 0.05
		XX ± 0.10	ANGLE ± 1°